

QuickStart Setup Guide



Logitech Indoor Camera Master System™

Congratulations on purchasing the WiLife Video Security System, an easy, professional, and complete digital security system that gives you the power to monitor what matters most to you. WiLife has redefined video security and that means you can view, record, and replay video footage from your cameras anywhere in the world, at any time.

With this Starter Kit, you have all the components for a complete video security system. This kit features the Indoor camera, which provides superior image quality and video performance. It also includes features like motion-based recording, alerts, and remote viewing. The flexible indoor mounting options make setup a breeze.

This quickstart setup guide will assist you in installing and setting up your own security system. Simply follow these instructions and you will be viewing live video from your camera in minutes.

Legal Warning

Logitech digital video security camera products are intended to be used in a lawful manner. Please note that certain uses of security camera products are prohibited or severely restricted by national, state and local laws, such as employee monitoring, surreptitious viewing and recording of images or sound, or the use, publication or distribution of image and sound recordings. Before using Logitech digital video security camera products you should become familiar with all applicable laws in your country. If you have any concern about certain uses of our products, kindly consult local authorities or local legal counsel.

Master System Components



- 1) Indoor Camera
- 2) USB Receiver Module
- 3) Power Supply
- 4) Suction Cup
- 5) Desktop Mount
- 6) Wall Mount Bracket
- 7) 8' Standard Ethernet Cable & USB Cable
- 8) Install CD (Includes WiLife Software and User's Guide)

System Requirements

Below, you can find the minimum and recommended requirements for systems running cameras using the default QVGA (320x240) settings. Running your cameras in the higher VGA (640x480) mode may require additional resources.

The WiLife Video Security System uses your Windows PC to record the video from your cameras and serve video to your remote devices. You need to have your PC on and running for the WiLife system to operate.

Requirements		Number of Cameras					
		1	2	3	4	5	6
CPU Speed:	Minimum	1.0 GHz	1.2 GHz	1.4 GHz	1.6 GHz	1.8 GHz	2.0 GHz
	Recommended	1.4 GHz	1.6 GHz	2.0 GHz	2.4 GHz	2.6 GHz	3.0 GHz
Memory (MB):	Minimum	256	384	512	512	512	512
	Recommended	384	512	512	768	768	1024
Video Card (MB): DirectX 9 compatible	Minimum	32	32	32	64	64	128
	Recommended	32	32	64	128	128	256
Display Resolution:		1024 x 768 or higher, 32 bit color					
Hard Drive (MB):		100 MB for program and a minimum of 500+ MB for video storage.					
Operating System:		Microsoft® Windows® Vista or Microsoft® Windows® XP Home Edition, XP Professional or, XP Media Center Edition					
Media Player:		Microsoft Windows Media® Player 9 or later					



Suction Cup Mount




Desk Mount



Wall Mount

Step 1 Run the Setup Wizard


Please read all instructions before starting the installation. We encourage you to exit all other programs.

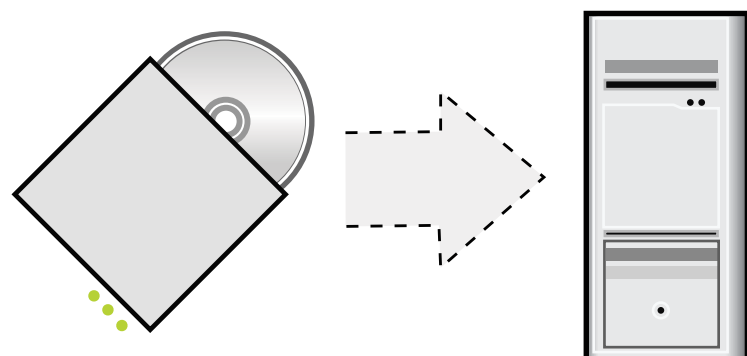


- Insert the Software CD.
- Click on the option "Install WiLife Software."
- Continue following the instructions on each screen of the InstallShield Wizard.

Step 2 Plug in USB Receiver Module

- When you see the "Plug in Receiver" screen, plug one end of the USB cable into the USB Receiver. Plug the USB Receiver into the wall plug.

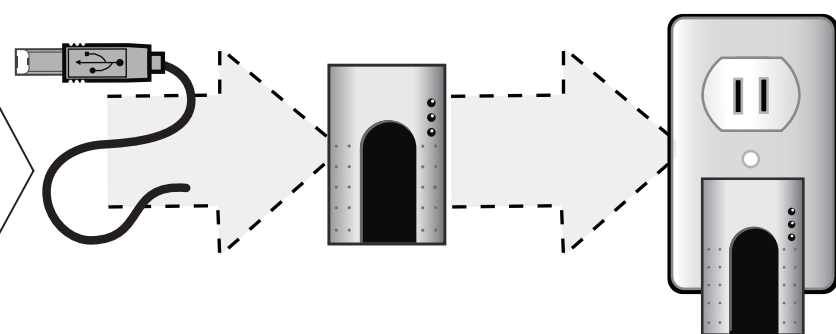


- Connect the USB cable from the USB Receiver to the USB port on your PC.

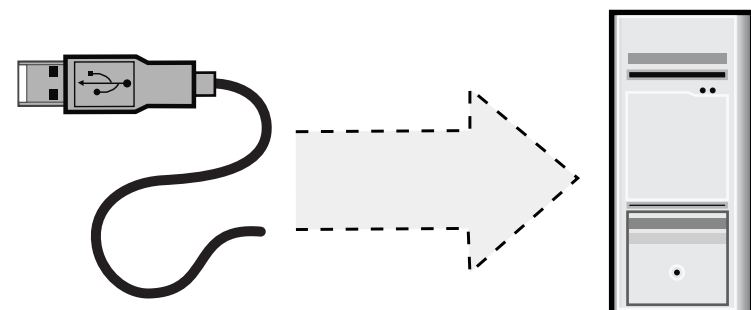


Step 3 Secure the Camera

- Select a location for the camera: wall or ceiling, desktop or window. Then mount the camera using either the suction cup, desktop stand, or wall mount.
- Plug the Ethernet cable into the camera and power supply.

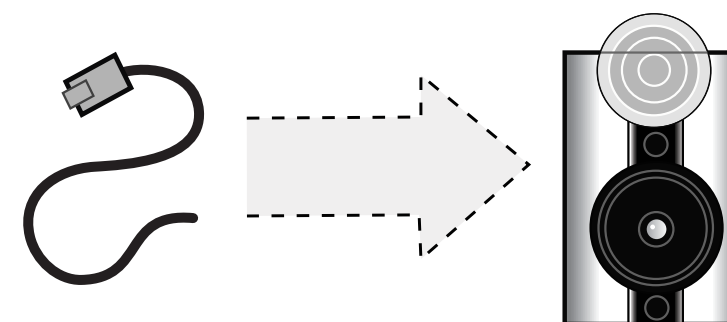


- Plug the power supply module into your wall outlet.

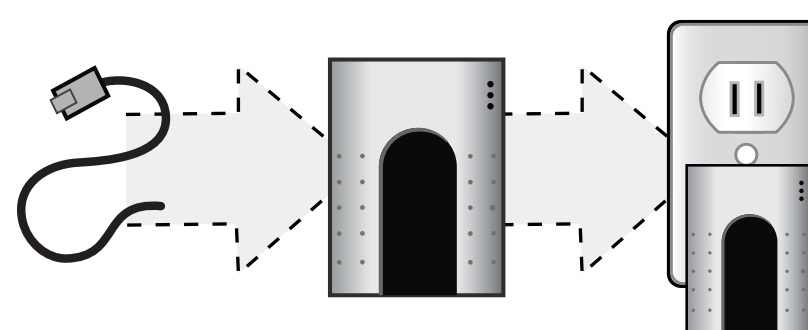

- Wait for the installation process to finish.
- When installation is complete, restart your PC.

Adjusting the Focus

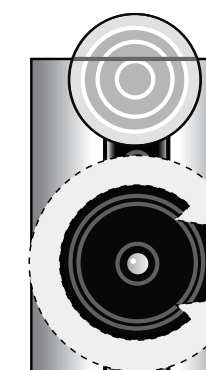

If necessary, focus the lens by adjusting it clockwise or counter-clockwise as necessary. This will require someone looking at the Live View of the software.

HINT: To focus, plug your camera into an outlet near your computer monitor. Once it is focused, you can re-mount your camera without the need to refocus.

Build a Complete Surveillance System



Add-on Indoor Camera



Add-on Outdoor Camera



Add-on Spy Camera

The WiLife Video Security System is available online at www.wilife.com and at other select retail stores and authorized resellers. Visit www.wilife.com to find a store or reseller near you.

Notes:

- If the Wizard does not automatically load, manually start the Wizard by running the setup.exe file on the CD.
- The Wizard checks to see if Microsoft® .NET framework exists on your PC. If Microsoft.NET is not currently installed on your PC, the InstallShield Wizard will install it for you. If the Installer has to load .NET, you will need to restart Windows after .NET is installed.

Computer Firewall Troubleshooting

During the WiLife Software installation, the First Run Wizard will test your PC's firewall settings and prompt you to allow WiLife to access the network. You should always answer "Yes." This allows WiLife to communicate with the cameras and remote devices.

Caution:

- To ensure a quality connection, do NOT plug the USB Receiver or Camera power supply into a surge protector or powerstrip. The WiLife components already have a built-in surge protection and must be plugged directly into your wall outlet.

Additional Mounting Instructions:

- Detailed instructions for mounting the camera on a wall, ceiling, or window are located in the Accessories box. The instructions sheet is titled "WiLife Accessories."

